

(12) **United States Patent**  
**Whitehead et al.**

(10) **Patent No.:** **US 9,101,177 B2**  
(45) **Date of Patent:** **\*Aug. 11, 2015**

(54) **HEATED INSOLE REMOTE CONTROL SYSTEMS**

(71) Applicant: **Schawbel Technologies LLC**, Bedford, MA (US)

(72) Inventors: **Ian Nicholson Whitehead**, Concord, NC (US); **James K. Lynch**, Bedford, MA (US)

(73) Assignee: **Schawbel Technologies LLC**, Burlington, MA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/466,477**

(22) Filed: **Aug. 22, 2014**

(65) **Prior Publication Data**

US 2014/0367372 A1 Dec. 18, 2014

**Related U.S. Application Data**

(63) Continuation of application No. 13/166,351, filed on Jun. 22, 2011, now Pat. No. 8,850,716.

(60) Provisional application No. 61/427,509, filed on Dec. 28, 2010.

(51) **Int. Cl.**  
**A43B 7/02** (2006.01)  
**A43B 3/00** (2006.01)  
**A43B 7/04** (2006.01)  
**A43B 13/38** (2006.01)  
**H05B 3/02** (2006.01)

(52) **U.S. Cl.**

CPC ..... **A43B 7/02** (2013.01); **A43B 3/0015** (2013.01); **A43B 7/04** (2013.01); **A43B 13/38** (2013.01); **H05B 3/02** (2013.01)

(58) **Field of Classification Search**

CPC ..... **A43B 7/04**; **A43B 7/02**; **A43B 3/0015**; **A43B 3/0005**; **A43B 7/00**; **A43B 3/00**  
USPC ..... **36/2.6**  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,680,918 A 6/1952 Behner  
3,360,633 A 12/1967 Weisberger  
(Continued)

**FOREIGN PATENT DOCUMENTS**

CN 2281677 5/1998  
CN 2515992 Y 10/2002  
(Continued)

**OTHER PUBLICATIONS**

International Search Report and Written Opinion mailed on Sep. 3, 2014, for International Patent Application No. PCT/US2014/033499, filed Apr. 9, 2014, (10 pages).

(Continued)


*Primary Examiner* — Ted Kavanaugh

(74) *Attorney, Agent, or Firm* — Brown Rudnick LLP

(57) **ABSTRACT**

A remote control wireless heated insole system in which address data identifying specific insoles to be heated is provided. Once the heating process is initiated, periodic repeated control signals are generated to cause heating of the insoles.

**15 Claims, 3 Drawing Sheets**

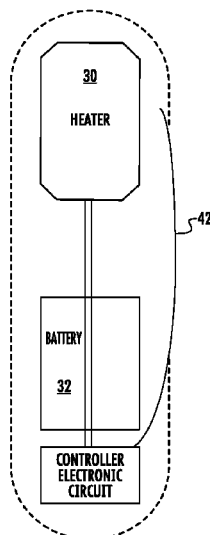

**US 9,101,177 B2**

Page 2

(56)

**References Cited****U.S. PATENT DOCUMENTS**

3,585,736 A 6/1971 Polichena  
 3,800,133 A 3/1974 Duval  
 4,507,877 A 4/1985 Vaccari et al.  
 4,665,301 A 5/1987 Bondy  
 4,823,482 A 4/1989 Lakic  
 D303,524 S 9/1989 Siegner et al.  
 4,894,931 A 1/1990 Senee et al.  
 4,910,881 A 3/1990 Baggio et al.  
 5,041,717 A 8/1991 Shay, III et al.  
 D320,212 S 9/1991 Someya  
 5,230,170 A 7/1993 Dahle  
 5,483,759 A 1/1996 Silverman  
 5,495,682 A 3/1996 Chen  
 5,592,759 A 1/1997 Cox  
 5,623,772 A 4/1997 Sunderland et al.  
 5,875,571 A \* 3/1999 Huang ..... 36/132  
 5,882,106 A 3/1999 Galli  
 5,956,866 A 9/1999 Spears  
 6,094,844 A 8/2000 Potts  
 D432,493 S 10/2000 Killebrew et al.  
 D440,201 S 4/2001 Huynh et al.  
 6,320,161 B1 11/2001 Hansen, Jr.  
 6,523,836 B1 2/2003 Chang et al.  
 6,657,164 B1 12/2003 Koch  
 D486,789 S 2/2004 Santiago  
 6,701,639 B2 3/2004 Treptow et al.  
 6,770,848 B2 8/2004 Haas et al.  
 6,840,955 B2 1/2005 Ein  
 6,841,757 B2 1/2005 Marega et al.  
 6,865,825 B2 3/2005 Bailey, Sr. et al.  
 D528,075 S 9/2006 Sugeno et al.  
 D533,832 S 12/2006 Hock  
 D538,225 S 3/2007 Lyman et al.  
 D538,226 S 3/2007 Lyman et al.  
 D546,277 S 7/2007 Andre et al.  
 D552,081 S 10/2007 Yano  
 7,497,037 B2 3/2009 Vick et al.  
 D602,432 S 10/2009 Moussa  
 D609,180 S 2/2010 Suzuki et al.  
 7,716,856 B2 5/2010 Seipel  
 7,726,046 B2 6/2010 Portnell  
 7,823,302 B2 11/2010 Mann et al.  
 D637,552 S 5/2011 Inman et al.  
 7,985,502 B2 7/2011 Abe et al.  
 D642,517 S 8/2011 Inman et al.  
 8,074,373 B2 12/2011 Macher et al.  
 8,084,722 B2 12/2011 Haas et al.  
 D654,429 S 2/2012 Li et al.  
 D660,798 S 5/2012 Tseng  
 D682,195 S 5/2013 Aglassinger  
 D685,729 S 7/2013 Lyman  
 D686,157 S 7/2013 Kawase et al.  
 8,510,969 B2 8/2013 Luo  
 D689,019 S 9/2013 Sato et al.  
 D694,176 S 11/2013 Buetow et al.  
 D698,313 S 1/2014 Buetow et al.

D699,178 S 2/2014 Ashida et al.  
 D699,179 S 2/2014 Alexander  
 D700,135 S 2/2014 Sato et al.  
 8,715,329 B2 5/2014 Robinson et al.  
 8,850,716 B2 \* 10/2014 Whitehead et al. .... 36/2.6  
 8,869,428 B1 10/2014 Zsolcsak et al.  
 2003/0114902 A1 6/2003 Prescott  
 2003/0145494 A1 8/2003 Hsu  
 2005/0126049 A1 6/2005 Koenig  
 2006/0174521 A1 8/2006 Lee  
 2006/0230641 A1 10/2006 Vick et al.  
 2006/0283050 A1 12/2006 Carnes et al.  
 2007/0039201 A1 2/2007 Axinte  
 2008/0016715 A1 1/2008 Vickroy  
 2008/0069524 A1 3/2008 Yamauchi et al.  
 2008/0083720 A1 4/2008 Gentile et al.  
 2008/0197126 A1 8/2008 Bourke et al.  
 2009/0013554 A1 1/2009 Macher et al.  
 2010/0192406 A1 8/2010 Au  
 2011/0083339 A1 4/2011 Luo  
 2011/0107771 A1 5/2011 Crist et al.  
 2011/0296714 A1 12/2011 Holzer  
 2013/0174451 A1 7/2013 Kremer et al.  
 2013/0181662 A1 7/2013 Shapiro  
 2013/0213147 A1 8/2013 Rice et al.  
 2013/0244074 A1 9/2013 Kremer et al.  
 2014/0182163 A1 7/2014 Krupenkin et al.  
 2014/0222173 A1 8/2014 Giedwoyn et al.  
 2014/0277632 A1 9/2014 Walker

**FOREIGN PATENT DOCUMENTS**

CN 201976877 U 9/2011  
 DE 20317143 U1 4/2004  
 DE 10352050 A1 12/2004  
 DE 102008029727 A1 12/2009  
 EP 2215918 A2 8/2010  
 KR 20-0273770 4/2002  
 WO 2006/111823 A1 10/2006  
 WO 2008/006731 A1 1/2008  
 WO 2008/069524 A1 6/2008  
 WO 2013/101920 A1 7/2013

**OTHER PUBLICATIONS**


International Search Report and Written Opinion for International application No. PCT/US12/23986 filed Feb. 2, 2012 and mailed on May 23, 2012, (7 pages).

International Search Report and Written Opinion mailed on Apr. 22, 2013, for International Patent Application No. PCT/US2012/071797, filed Dec. 27, 2012, (9 pages).

Kenisarin et al., 2007, Solar energy storage using phase change materials, Renewable and Sustainable Energy Reviews, 11(9):1913-1965.

Sharma et al., 2009, Review on thermal energy storage with phase change materials and applications, Renewable and Sustainable Energy Reviews, 13(2):318-345.

\* cited by examiner

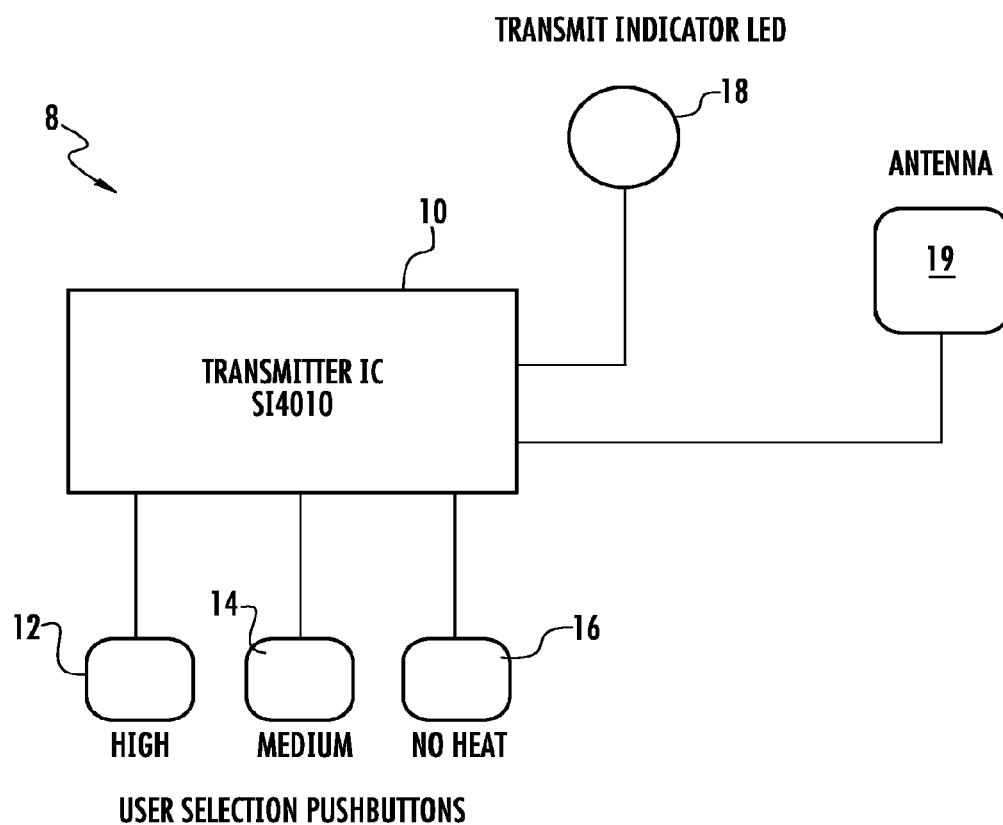

**FIG. 1**



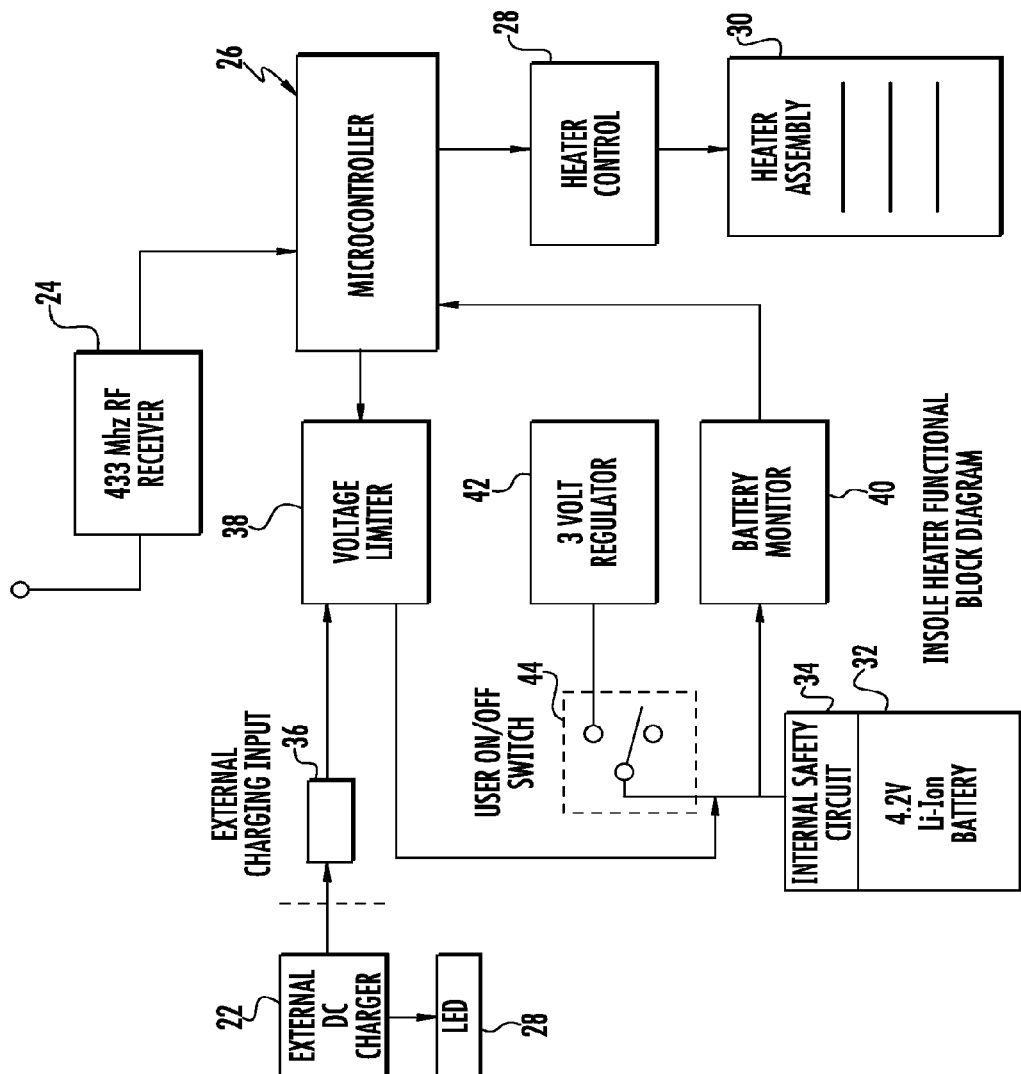
INSOLE HEATER FUNCTIONAL  
BLOCK DIAGRAM

FIG. 2

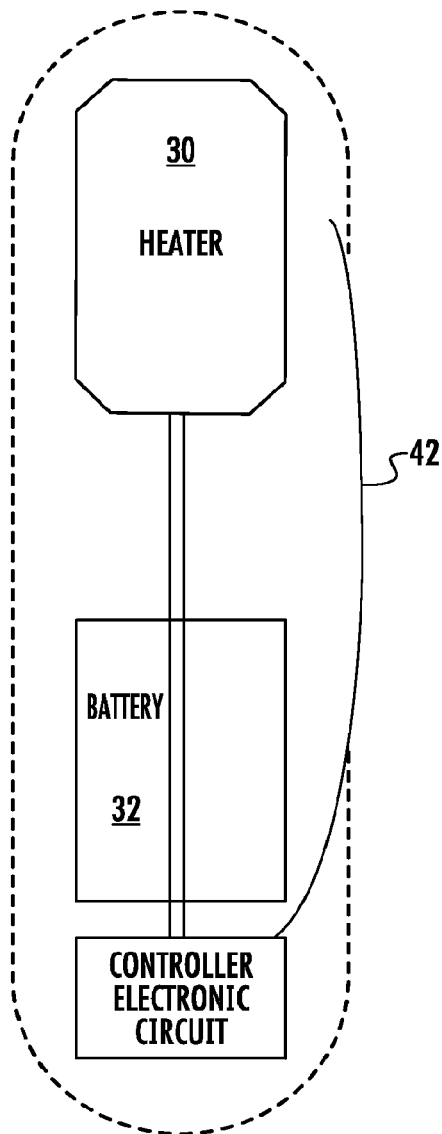

**FIG. 3A**

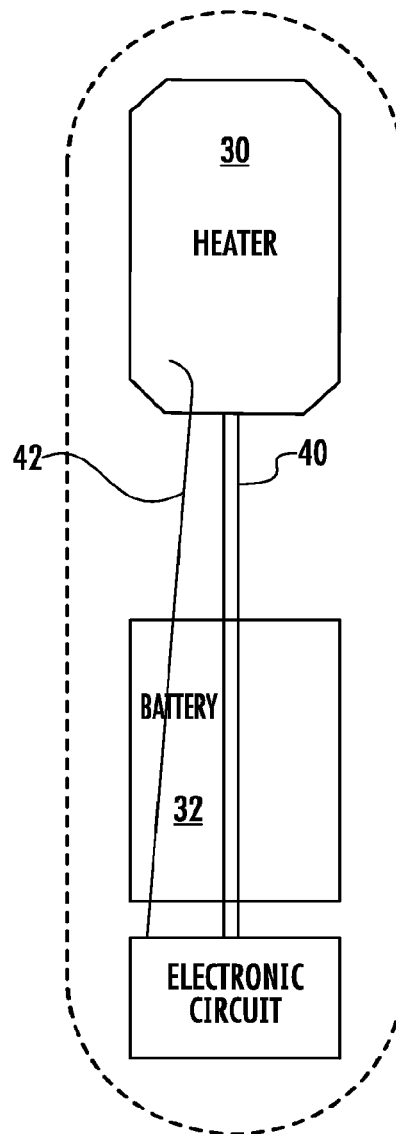

**FIG. 3B  
(PRIOR ART)**

US 9,101,177 B2

1

**HEATED INSOLE REMOTE CONTROL SYSTEMS**

## RELATED APPLICATIONS

This application is a continuation of U.S. Non-Provisional patent application Ser. No. 13/166,351, filed Jun. 22, 2011, which claims the benefit of and priority to U.S. Provisional Patent Application Ser. No. 61/427,509, filed Dec. 28, 2010. The contents of both are incorporated by reference herein.

## FIELD OF THE INVENTION

The present invention relates to a remotely controlled heated insole for footwear and to an improved method of control of such heated insoles that provides a more reliable means of ensuring that the temperature desired by the user is realized.

## BRIEF DESCRIPTION OF THE INVENTION

The present invention is directed to heating insoles of footwear, and improving the ability to realize desired temperatures through wireless control signals. Heated insoles are intended to aid a user in withstanding cold weather by providing supplementary heat in the case where normal body heating is not enough or when additional heat is desired to be more comfortable. When an extremity of the body starts to become cold, the body's natural physiological response of vasoconstriction occurs in which the nervous system restricts blood flow to the cold extremity in an effort to keep the rest of the body warm. It is well known that frostbite and other cold related injuries occur first in fingers and toes due to vasoconstriction and keeping these extremities warm will help insure survival or at minimum a more pleasurable outdoor experience.

Heated insoles are a key component to preventing injury in cold weather and are well known to hunters and outdoorsmen as standard survival gear while in the woods or forest. A problem exists however in the control of such insoles as often the insole temperature needs to be adjusted to accommodate different conditions and comfort levels. Standard temperature adjustment methods require the user needs to remove his or her boot to gain access to the insole in order to make desired adjustments. Not only is this procedure time consuming but removing the user's foot from the boot to gain access to the insole exposes the foot to the cold conditions. This adjustment procedure undoubtedly lowers the foot temperature even further thereby further increasing risk or injury.

An improved method of control has been developed however utilizing a hand held remote control system which employs a transmitter unit external to the insole and a receiver unit located within the insole assembly inside the boot. The desired heat adjustment is then performed by the user selecting a heat setting on the hand held remote unit which is then wirelessly transmitted to the receiver unit located within the heated insole assembly. Although this improved method of control is an improvement, the design requirements for a proper fitting heated insole yields conditions not optimum for wireless control as will be pointed out in the following discussion.

Heated insoles are placed in a shoe with its bottom surface against the bottom of the shoe and the upper surface against the user's foot when in use. Antenna placement within the insole is positioned parallel to the ground surface and also to the foot placed above it. A problem exists in the prior art however in which this restrictive antenna positioning tends to

2

prohibit the reception of information transmitted from the hand held unit to the receiver unit due to the signal grounding effect produced by the earth's surface on the bottom and the user's foot on top of the antenna. This grounding effect is often severe enough that it inhibits information from the transmitter to the receiver unit, therefore preventing any heating adjustments to be made.

Additionally, the location of the RF receiver, inside shoes, adjacent to the ground requires special consideration to overcome signal loss. Prior art radio controlled insoles include the wire antenna along the midline of the insole. This has been problematic because signal strength is affected. The inventors realized that much of the transmitted signal is blocked by the ground from reaching the receiver antenna located in the insole. The foot and body of the wearer also tend to block the signal. One improvement of this invention for the receiver antenna is to locate it more advantageously for signal reception, for instance, near the outer margin of the insole. Reception is materially improved with such an antenna.

The present invention includes a heated insole device that uses radio frequency communication with an improved transmission system to control the desired insole temperature. The present invention uses a standard frequency of 433 Megahertz but may be used with other frequencies, such as the common 2.4 Gigahertz.

As described above, the manufacturing of an insole product requires that the device itself be relatively flat and fit within a standard shoe or boot. This requirement forces the necessary power source, control methods and communication means to all exist within the confines of the shoe and lie in a flat plane parallel to the earth's surface. Although this space limitation is achievable with good design practice, radio communication suffers largely due to the horizontal orientation of the antenna, its proximity to the earth and the person standing above it. Furthermore, transmission at the frequencies described above is dictated by governing authorities to be a limited transmission of a just a few seconds per hour, so the notion of continuous transmission, if even in the power budget, would be prohibited.

The present invention also discloses a system and method of communication that helps to ensure that user commands are more effectively transmitted by providing a plurality of transmissions at specific spaced intervals of time. By providing discrete, timed transmissions after the user temperature control has been initiated, the probability of transmissions coinciding with the user taking a step and lifting his foot off the ground is increased. The timed control signal may be initiated by the remote or may be controlled by a microprocessor within the insole. With the foot off the ground, the distance between the horizontally placed antenna within the insole and the earth's surface is greatly increased, thus increasing the reception range for the insole. A secondary action that occurs while a foot is in the air is that the pressure of the person wearing the shoe is relieved from the insole, decompressing the foam some measurable amount between the antenna and the person. This decompression although small, tends to increase the transmission success thus providing a better user experience.

For example, it is well known that an adult person walks at a rate of three miles per hour, which equates to four feet per second with a stride length of about eighteen inches. This stride and pace suggests approximately 2.6 steps be taken every second.

Since bipedal humans alternate feet while walking, this suggests that each foot is lifted off the ground every 1.3 seconds or approximately once per second.

US 9,101,177 B2

3

Knowing that each foot is off the ground once per second for almost a second, allows more robust communication by providing transmissions that occur while the foot position is in the air and not on the ground surface. Transmissions every half second will insure some of the broadcasted signal will be simultaneous with the foot being in the air, thus delivering the intended command to the insole device. Other time periods may be chosen in accordance with prevailing governmental regulation.

For skiers or snowboarders who use this invention, the position of the foot also shifts from purely horizontal to some vertical orientation, such as when a skier uses edges or a boarder shifts positions. Still further, the heating operation may occur while the user is in a lift chair which also alters the orientation of the sole.

Transmitting the sequence of coded signals periodically for a short period of time after the initiation of the process to heat the insole increases the ability of the user to more effectively communicate the heating instructions to the insole.

The instant invention includes a battery powered electrically heated pair of insoles that are in radio communication with a key fob R/F transmitter. The battery is a lithium ion polymer battery and is provided with a self-contained conventional protective circuit. The transmitter sends out an encoded signal to be received and decoded by a unique pair of insoles. The insole has an on/off switch. This switch may be placed in the on position before the insole is placed inside the shoe.

When the switch is placed in the on position, the insole does not produce heat, but the R/F system in the insole is ready to receive commands from the key fob transmitter. Each insole has an on/off switch and may have a unique code permitting selected insoles to be heated. When both switches are on, both insoles will respond to the key fob transmitter. The user may utilize the key fob transmitter to select among; no heat, medium heat, and high heat by pressing the appropriate button on the key fob transmitter. Settings other than discrete may be used.

When a heat setting is selected on the key fob transmitter, the RF receiver in the insole detects the signal and, if intended for a specific insole, activates the process therein. The microprocessor senses the temperature near the heater, and if the temperature is too low for the selected setting, current flows from the battery to the heater until a thermistor reaches a predetermined temperature. The thermistor generates a signal which is sent to the microprocessor. The microprocessor controls the flow of current to achieve and maintain the desired temperature until the user selects another setting. Other methods of controlling the heat in the insole may be employed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of the transmitter unit;

FIG. 2 is a block diagram of the electronic circuit within the insole; and

FIGS. 3A and 3B are partial sectional views of the insole showing the location of the antenna in the present invention and in the prior art.

#### DETAILED DESCRIPTION

FIG. 1 is a block diagram showing the transmitter **10** of this invention. The transmitter comprises an integrated circuit **S14010** which is connected to a plurality of push buttons **12**, **14** and **16**. The push buttons generate signals to cause high, medium and no heat conditions, respectively, to be generated

4

within the insole. The user selects a push button to be activated in order to control the temperature within the insole.

An LED **18** may be connected to the transmitter to indicate that the transmitter is transmitting and/or to indicate that the transmitter is on and capable of transmitting. An antenna **19** connected to the transmitter wirelessly transmits electronic signals generated in transmitter **10** to the electrical circuit within the insole.

The transmitter **10** decodes the user command by determining which of the push buttons is selected, and the transmitter provides a burst of four packets of information or electrical signals with each packet consisting of an address and data. The packet length, by example, is 120 ms in length and the entire four packets takes approximately 512 ms to transmit. To ensure the command is received properly, the four packet sequence is repeated every 15 seconds over the next minute for a total of 20 packets. This is within current FCC regulations.

Referring to FIG. 2, there is shown an electrical circuit located within the insole. Transmitted data packets are received and decoded through receiver **24** and connected to microcontroller **26**. The decoded signal is sent to the microcontroller for processing, which creates a control signal for heater control **28** to achieve the desired temperature condition for the insole. Additionally, the address data identifies the insole to be controlled. The heater control **28** is connected to heater assembly **30** located within the insole to heat the insole to a desired temperature. The heater assembly also includes a temperature sensing device such as a thermistor to determine the real time temperature of the heated insole to determine if further heating is required under control of microcontroller **26**.

The microcontroller **26** and heater assembly **30** are powered by a 4.2 volt lithium ion polymer battery **32** having an internal safety circuit **34**.

The lithium battery **32** is recharged by using an external DC charger **22** connected to input jacks **36** located within the insole. The charging is thus controlled outside of the insoles. A voltage limiter **38** is connected to the output of the external charging input to ensure that the voltage supplied to recharge battery **32** is maintained below a certain level. Battery charging is achieved by using the external charger to control voltage and current to the batteries, and the voltage limiter **38** provides fine voltage control to optimize battery charging. An LED **23** is provided with the external DC charger **22** to display the battery status so it can be determined when the battery has been sufficiently charged, and the external charger may be unplugged from the insoles. A three volt regulator circuit **42** is provided to ensure that the microcontroller and heater assembly properly operate. The control circuit for the system shown in FIG. 2 includes voltage regulator **42** to control the voltage at microcontroller **36**.

Locating the protective circuit **34** within the battery is an improvement over having a protective circuit outside of the lithium battery. Providing the protective circuit within the lithium battery is important because if the battery leads short circuit, a hazard will be prevented by having the protective circuit therein. If the protective circuit is remote from the lithium battery, damage from such short circuit to the battery will not be prevented.

In normal use, the user sets the on/off switch **44** to the on position in the insole to allow the battery voltage to control the electronic circuitry therein. The microcontroller **26** receives a command signal from RF receiver **24** and decodes the information to see if the unique address matches that of the insole. If such a match is found, the microcontroller then determines from the command signal the heat setting which is desired.

US 9,101,177 B2

5

Once such heat setting is decoded, the microcontroller **26** then commands the control circuit **28** to turn on the heater and maintain a desired heating set point. This continues until the user switches the on/off switch to off or the battery power is exhausted. Additionally, there is a heat control (No Heat) in the transmitter which also can turn off the heating unit.

The instant invention includes a battery powered electrically heated pair of insoles that are in radio communication with the key fob R/F transmitter **8** (see FIG. **1**). The transmitter **10** sends out an encoded signal that may be received and decoded by a unique pair of insoles. When the switch in the insole is on, the insole does not produce heat, but the R/F system in the insole is ready to receive commands from the key fob transmitter. Each insole has its own on/off switch. When both switches are on, both insoles may respond to the key fob transmitter depending on the address data. The user may utilize the key fob transmitter **8** to select among; no heat, medium heat, and high heat by pressing the appropriate button on the key fob transmitter **8**.

When a heat setting is selected on the key fob transmitter **8**, the RF receiver **24** in the insole detects the signal and activates microprocessor **26**. The microprocessor **26** senses the state of a temperature measuring thermistor located near the heater, and if the temperature is too low for the selected setting, current flows from the battery **32** to the heater **30** until the thermistor reaches a desired temperature. Then, the microprocessor **26** reduces the flow of current to keep the predetermined temperature. The temperature is maintained until the user selects another setting.

The location of the RF receiver, inside shoes, adjacent to the ground requires special consideration to overcome signal loss. Prior art radio controlled insoles locate the wire antenna **40** along the midline of the insole (see FIG. **3b**). This has been problematic because signal strength is not sufficient. Much of the transmitted signal is blocked by the ground from reaching the receiver antenna located in the insole. The foot and body of the wearer also tend to block the signal. The receiver antenna **42** of this invention is located near the outer margin of the insole (see FIG. **3a**).

When the user is ready to recharge the batteries, the insoles may be removed from the shoes and the switches are placed in the off position. In the alternative, the charging jacks may be available from outside the footwear by suitable protective waterproofing of such jacks.

It should be understood that the preferred embodiment was described to provide the best illustration of the principles of the invention and its practical application to thereby enable one of ordinary skill in the art to utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. All such modifications and variations are within the scope of the invention as determined by the appended claims when interpreted in accordance with the breadth to which they are fairly legally and equitably entitled.

The invention claimed is:

**1.** A system for remotely adjusting the temperature of an insole, the system comprising:

an electronic circuit and a heating element contained within the insole, the electronic circuit comprising:  
a receiver configured to receive wireless transmissions;  
and

6

a microprocessor in communication with the receiver and the heating element;  
a member on the insole for turning the electronic circuit on and off; and

a remote transmitter configured to transmit an initial, wireless control signal to the receiver upon receipt of a command to adjust the temperature of the heating element, the remote transmitter further configured to, after transmission of the initial wireless control signal, automatically transmit two or more additional wireless control signals to the receiver at periodic intervals that correspond to a user stride pattern, the initial wireless control signal and each additional wireless control signal instruct the microprocessor to execute the same received command to adjust the temperature of the heating element.

**2.** The system according to claim **1**, wherein the additional wireless control signals are initiated by the initial wireless control signal.

**3.** The system according to claim **2**, wherein the initial wireless control signal is triggered by a button in the transmitter.

**4.** The system according to claim **3**, wherein the button is depressed once to trigger the initial wireless control signal.

**5.** The system according to claim **1**, wherein the additional wireless control signals are transmitted periodically for a time period of five minutes or less.

**6.** The system according to claim **5**, wherein the additional wireless control signals are transmitted periodically over a time period of two minutes or less.

**7.** The system according to claim **6**, wherein the additional wireless control signals are generated approximately every fifteen seconds.

**8.** The system according to claim **1**, wherein the insole comprises a flat rechargeable ion lithium battery, the electronic circuit further comprising a voltage regulator connected to the lithium battery to regulate the voltage of the lithium battery.

**9.** The system according to claim **8**, wherein the electronic circuit in the insole further comprising a voltage limiter connected to the lithium battery.

**10.** The system according to claim **1**, further comprising housing means in the insole for the lithium battery, the housing means enabling the lithium battery to be easily removed from the insole.

**11.** The system according to claim **1**, further comprising an antenna in communication with the electronic circuit, the antenna located in the periphery of the insole.

**12.** The system according to claim **1**, wherein the initial and additional wireless control signals comprise unique insole identification data.

**13.** The system according to claim **12**, wherein the unique insole identification data comprises data sequences corresponding to one or more insoles to be heated.

**14.** The system according to claim **1**, wherein the insole comprises a lithium polymer battery and a safety circuit within the battery.

**15.** The system according to claim **14**, wherein the battery comprises an input jack for connecting to charging sources outside of the insole.

\* \* \* \* \*